

HPL-660-Q/1~50W

SPECIFICATIONS





**WATER COOLING LD PUMPED
ALL-SOLID-STATE Q-SWITCHED
RED LASER at 660nm**

All solid state Q-switched red laser at 660nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in laser measurement, laser display, scientific research, and so on.



Wavelength (nm)	660±1	
Operating mode	Acousto-Optic Q-switched	
Average power (W)	1~20 @5kHz	20~50 @5kHz
Pulse duration (ns)	~150 @5kHz	
Rep. rate (kHz)	5	
Single pulse energy (mJ)	2	5
Peak power (kW)	13 @5kHz&20W	33@5kHz&50W
Ave power stability (over 4 hours)	<3%, <5%	
Beam divergence, full angle (mrad)	<3.5	
Beam diameter at the aperture (mm)	<9	<12
Beam height from base plate (mm)	65	
Warm-up time (minutes)	<10	
Cooled method	Water Cooled (Choose water chiller according to power)	
Operating temperature (°C)	15~35	
Power supply (220/110VAC)	PSU-HPL-Q & PSU-HPL-CW	
Expected lifetime (hours)	10000	
Warranty period	1 year	

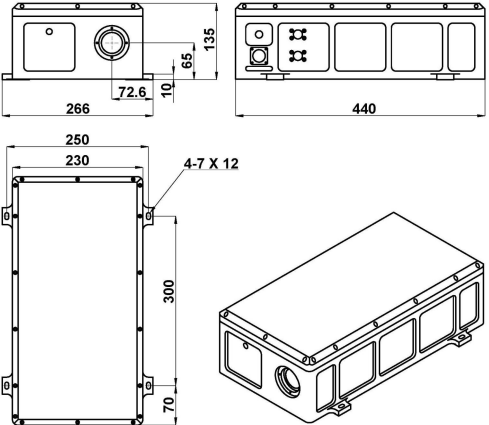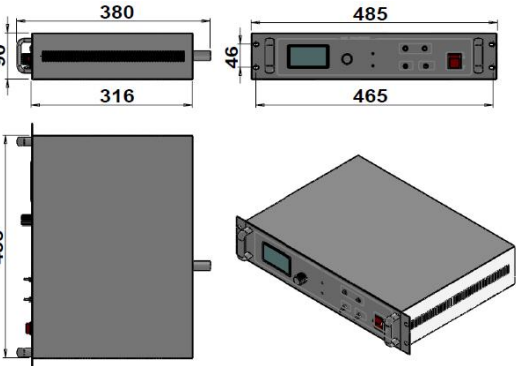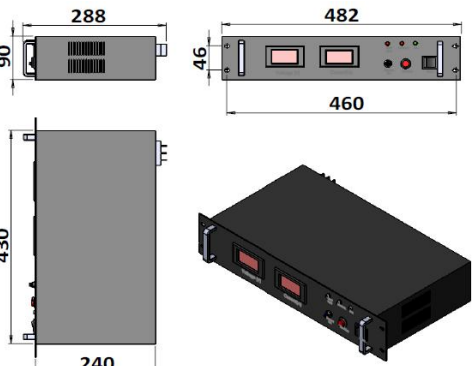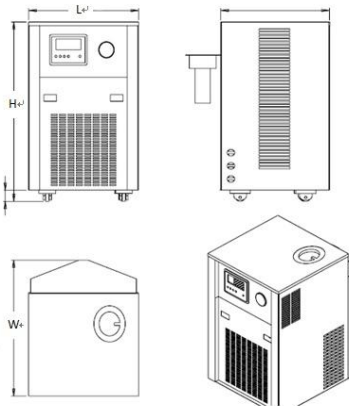

HPL-660-Q	PSU-HPL-Q	PSU-HPL-CW	Water Chiller
 <p>440 (L) × 266 (W) × 135 (H) mm³, 15kg</p>	 <p>380(L) × 485(W) × 90(H) mm³, 7.5kg</p>	 <p>288(L) × 482(W) × 90(H) mm³, 5.5kg</p>	 <p>435 (L) × 560(W) × 760(H) mm³, 60kg 470 (L) × 565(W) × 900(H) mm³, 75kg</p>