

MLL-III-488L/1~50mW



LOW NOISE BLUE DIODE
LASER AT 488 nm





It features ultra compact design, long lifetime, cost-effectiveness and easy operation. They are used in medical imaging, flow cytometry, DNA sequencing, etc.



SPECIFICATIONS

| | |
|--|--|
| Central wavelength (nm) | 488±5 |
| Operating mode | CW |
| Output power (mW) | >1, 10, 20, ..., 50 |
| Power stability (rms, over 4 hours) | <3%, <2%, <1%, <0.5% |
| Transverse mode | Near TEM ₀₀ |
| Noise of amplitude(rms,20Hz~20MHz) | <1% |
| M ² factor | <2.0 (<1.5 optional) |
| Beam diameter at the aperture (1/e ² ,mm) | ~3.5 (~1.5 optional) |
| Beam divergence, full angle (mrad) | ~1.0 |
| Polarization ratio | >50:1 (>100:1, optional) Horizontal±5 degree (Vertical Optional) |
| Warm-up time (minutes) | <5 |
| Pointing stability after warm-up (mrad) | <0.05 |
| Beam height from base plate (mm) | 24.8 |
| Operating temperature (°C) | 10~35 |
| Power supply | 85-264VAC PSU-III-LED/ PSU-III-FDA (Frequency for 1Hz-30kHz) |
| | 100-240VAC PSU-A-D (Frequency for 30kHz -100kHz) |
| TTL / Analog modulation | TTL or Analog with 1Hz-1kHz 1kHz-10kHz, 10kHz-30kHz, 30kHz-100kHz optional |
| Expected lifetime (hours) | 10000 |
| Warranty | 1 year |

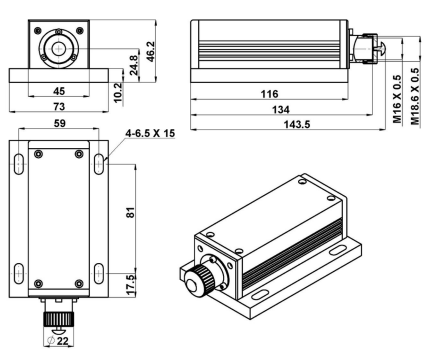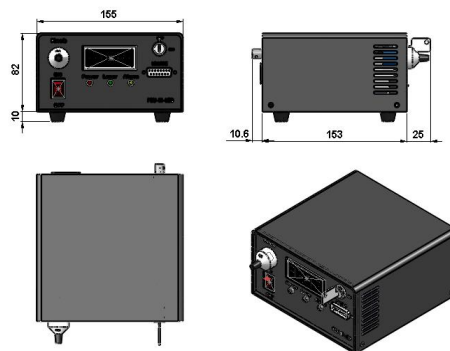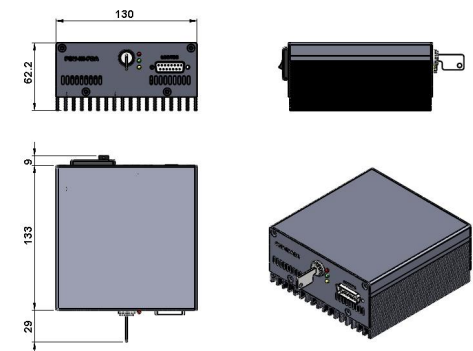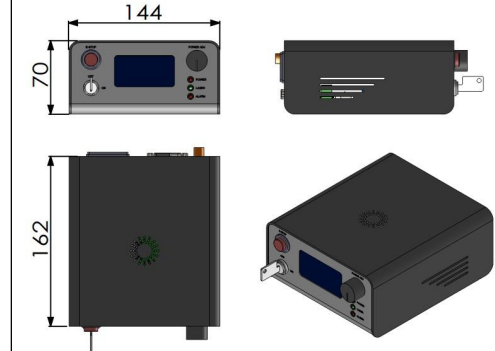

| MLL-III-488L | PSU-III-LED | PSU-III-FDA | PSU-A-D |
|--|--|--|--|
|  <p>143.5(L)×73(W)×46.2(H) mm³, 0.7kg</p> |  <p>188.6 (L) ×155(W) ×92 (H) mm³, 1.5kg</p> |  <p>171(L) ×130(W) ×62.2 (H) mm³, 1.2kg</p> |  <p>162(L) ×144(W) ×70 (H) mm³, 1.0kg</p> |