

EO-LS-1064/0.3mJ~0.6mJ/0.5~4W

LD PUMPED ALL-SOLID-STATE EOM Q-SWITCHED LASER AT 1064 nm

All solid state EOM Q-switched laser at 1064 nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in marking, carving, measure, research and so on.




SPECIFICATIONS

Wavelength (nm)	1064±1
Operating mode	Electro-optic Q-switched
Average power (W)	0.5~4W (4W@10kHz) Average power (W) = Single pulse energy (mJ) * Rep. rate (kHz)
Single pulse energy (mJ)	0.3~0.6mJ(0.6mJ @5kHz)
Rep. rate (kHz)	1~10
Pulse duration (ns)	<7@10kHz
Peak power (MW)	0.05~0.1 (0.1MW@5kHz)
Ave power stability (over 4 hours)	<3%, <5%
Warm-up time (minutes)	<10
Beam divergence, full angle (mrad)	<1.5
Beam diameter at the aperture (1/e2,mm)	~2
M ² factor	<1.3
Beam height from base plate (mm)	75
Cooled method	Air cooled
Operating temperature (°C)	10~35
Power supply (220/110VAC)	PSU-AOM(3U)
Expected lifetime (hours)	10000
Warranty period	1 year




EO-LS-1064

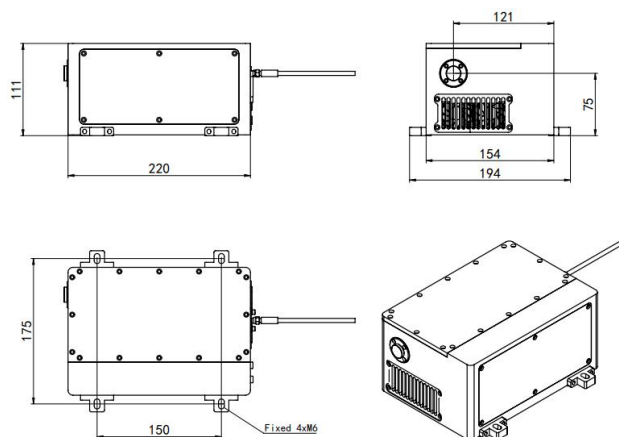

220 (L)×175 (W) ×75(H) mm³, 小于6kg

PSU-AOM (3U)

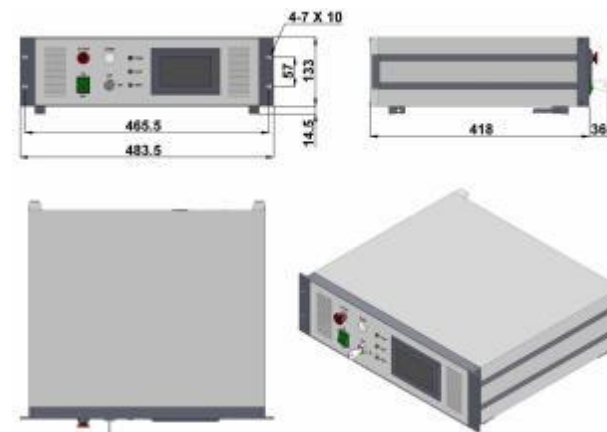

483.5 (L) ×454 (W) ×147.5 (H) mm³, 8.3 kg



EO-LS-1064/0.6mJ~1.5mJ/4~13W

LD PUMPED ALL-SOLID-STATE EOM Q-SWITCHED LASER AT 1064 nm

All solid state EOM Q-switched laser at 1064 nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in marking, carving, measure, research and so on.




SPECIFICATIONS

Wavelength (nm)	1064±1
Operating mode	Electro-optic Q-switched
Average power (W)	4~13W (13W@10kHz) Average power (W) = Single pulse energy (mJ) * Rep. rate (kHz)
Single pulse energy (mJ)	0.6~1.5mJ (1.5mJ @5kHz)
Rep. rate (kHz)	1~10
Pulse duration (ns)	<7@10kHz
Peak power (MW)	0.18~0.3 (0.3MW@1kHz)
Ave power stability (over 4 hours)	<3%, <5%
Warm-up time (minutes)	<10
Beam divergence, full angle (mrad)	<1.5
Beam diameter at the aperture (1/e2, mm)	~2
M ² factor	<1.3
Beam height from base plate (mm)	109
Cooled method	Air cooled
Operating temperature (°C)	10~35
Power supply (220/110VAC)	PSU-AOM(3U)
Expected lifetime (hours)	10000
Warranty period	1 year




EO-LS-1064

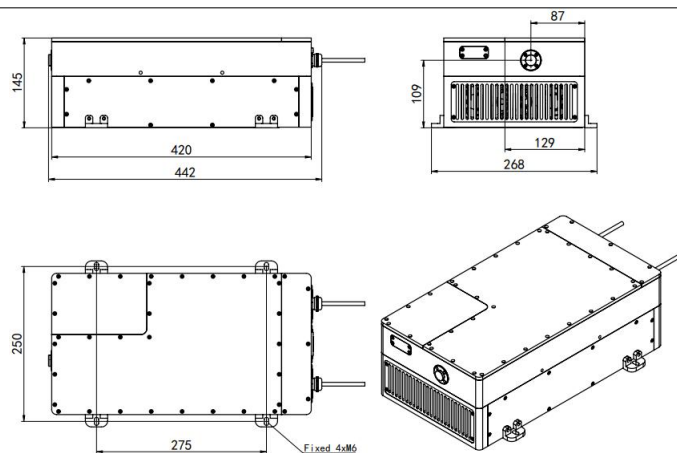

442 (L)×250 (W) ×109(H) mm³, 小于20kg

PSU-AOM (3U)

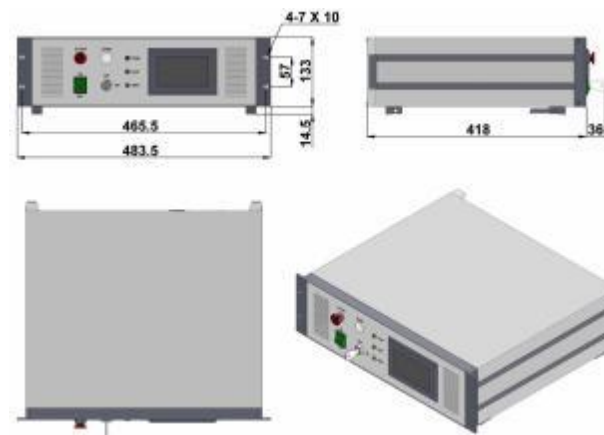

483.5 (L) ×454 (W) ×147.5 (H) mm³, 8.3 kg

EO-LS-1064/1.5mJ~5mJ/13~38W

LD PUMPED ALL-SOLID-STATE EOM Q-SWITCHED LASER AT 1064 nm

All solid state EOM Q-switched laser at 1064 nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in marking, carving, measure, research and so on.




SPECIFICATIONS

Wavelength (nm)	1064±1
Operating mode	Electro-optic Q-switched
Average power (W)	13~38W (38W@10kHz) Average power (W) = Single pulse energy (mJ) * Rep. rate (kHz)
Single pulse energy (mJ)	1.5~5mJ(5mJ @5kHz)
Rep. rate (kHz)	1~10
Pulse duration (ns)	<7@5kHz
Peak power (MW)	0.4~1.3 (1.3MW@1kHz)
Ave power stability (over 4 hours)	<3%, <5%
Warm-up time (minutes)	<10
Beam divergence, full angle (mrad)	<1.5
Beam diameter at the aperture (1/e2, mm)	~2
M ² factor	<1.3
Beam height from base plate (mm)	108
Cooled method	Water cooled
Operating temperature (°C)	10~35
Power supply (220/110VAC)	PSU-AOM
Expected lifetime (hours)	10000
Warranty period	1 year




EO-LS-1064

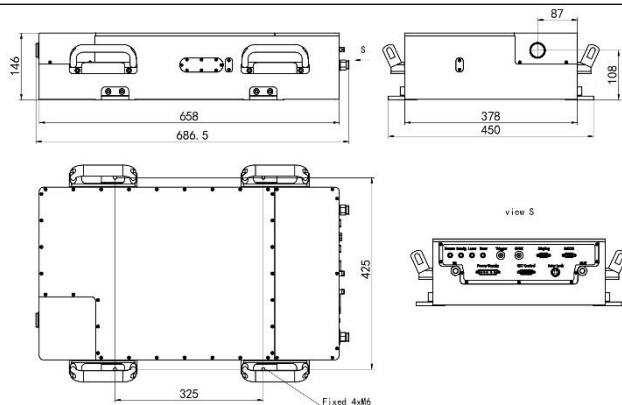


686.5(L) × 378(W) × 146(H) mm³, 50kg

Power supply

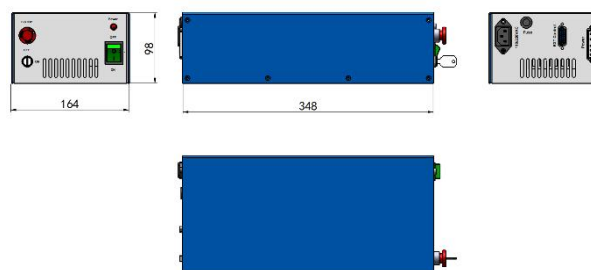

348 (L) × 164(W) × 98(H) mm³, 3 kg

Water Chiller

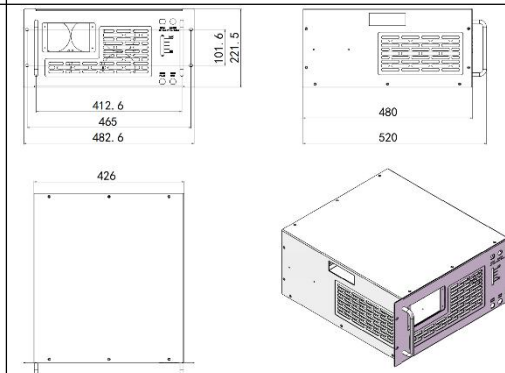

520(L) × 482.6(W) × 221.5(H) mm³, 25 kg