

# 长春新产业光电技术有限公司

Changehun New Industries Optoelectronics Tech, Co., Ltd.

DATA SHEET

# EO-LS-532/0.3~0.7mJ/0.6~4W

#### SPECIFICATIONS


## LD PUMPED ALL-SOLID-STATE EOM Q-SWITCHED LASER AT 532 nm


All solid state EOM Q-switched laser at 532 nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in marking, carving, measure, research and so on.



Wavelength (nm)	532±1
Operating mode	Electro-optic Q-switched
Average power (W)	0.6~4W (4W@10kHz)
	Average power (W) = Single pulse energy (mJ) * Rep. rate (kHz)
Single pulse energy (mJ)	0.3~0.7mJ(0.7mJ @5kHz)
Rep. rate (kHz)	1~10
Pulse duration (ns)	<6@10kHz
Peak power (kW)	0.07~0.15 (0.15MW@5kHz)
Ave power stability (over 4 hours)	<3%, <5%
Warm-up time (minutes)	<10
Beam divergence, full angle (mrad)	<1.5
Beam diameter at the aperture (1/e2,mm)	~2
M <sup>2</sup> factor	<1.3
Beam height from base plate (mm)	109
Cooled method	Air cooled
Operating temperature (°C)	10~35
Power supply (220/110VAC)	PSU-AOM(3U)
Expected lifetime (hours)	10000
Warranty period	1 year



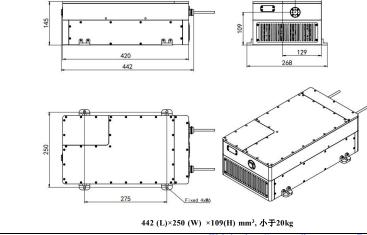

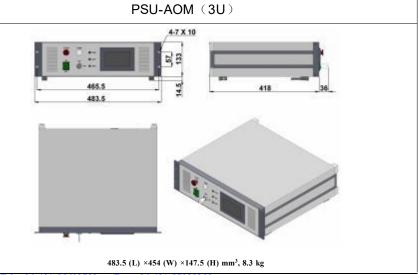



# 长春新产业光电技术有限公司

Changehun New Industries Optoelectronics Tech, Co., Ltd.

DATA SHEET

### EO-LS-532/0.7~2mJ/4~15W

#### SPECIFICATIONS

## LD PUMPED ALL-SOLID-STATE EOM Q-SWITCHED LASER AT 532 nm

All solid state EOM Q-switched laser at 532 nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in marking, carving, measure, research and so on.



Wavelength (nm)	532±1
Operating mode	Electro-optic Q-switched
Average power (W)	4~15W (15W@10kHz)
	Average power (W) = Single pulse energy (mJ) * Rep. rate (kHz)
Single pulse energy (mJ)	0.7~2mJ(2mJ @5kHz)
Rep. rate (kHz)	1~10
Pulse duration (ns)	<6@5kHz
Peak power (kW)	0.15~0.4(0.4MW@5kHz)
Ave power stability (over 4 hours)	<3%, <5%
Warm-up time (minutes)	<10
Beam divergence, full angle (mrad)	<1.5
Beam diameter at the aperture (1/e2,mm)	~2
M <sup>2</sup> factor	<1.3
Beam height from base plate (mm)	108
Cooled method	Water cooled
Operating temperature (°C)	10~35
Power supply (220/110VAC)	PSU-AOM
Expected lifetime (hours)	10000
Warranty period	1 year



India Road Wightersh Jawe Chang

man first for 1.4 with

