

HPL-440-Q/1~1000mW

SPECIFICATIONS





**WATER COOLING LD PUMPED
ALL-SOLID-STATE Q-SWITCHED
BLUE LASER at 440nm**

All solid state Q-switched blue laser at 440nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in marking, carving, measure, scientific research, and so on.



Wavelength (nm)	440±1
Operating mode	Acousto-Optic Q-switched
Average power (mW)	1~1000
Pulse duration (ns)	~200@10kHz&1W
Rep. rate (kHz)	10 (It is possible to customize other repetition rates)
Ave power stability (over 4 hours)	<3%, <5%
Beam divergence, full angle (mrad)	<3.5
Beam diameter at the aperture (mm)	<6
Beam height from base plate (mm)	60
Warm-up time (minutes)	<10
Cooled method	Water Cooled
Operating temperature (°C)	15~35
Power supply (220VAC)	PSU-HPL-Q & PSU-HPL-CW
Expected lifetime (hours)	10000
Warranty period	1 year

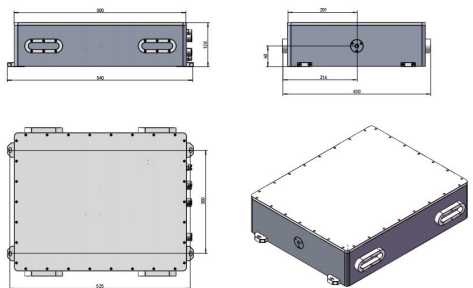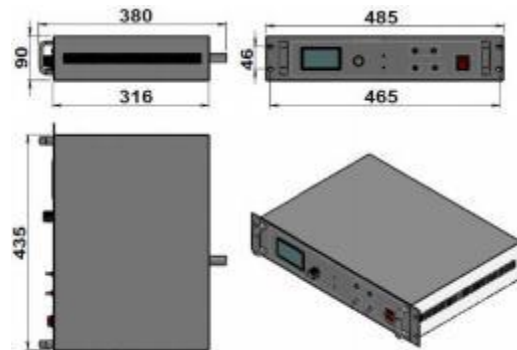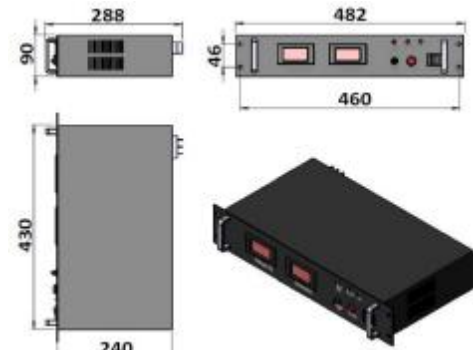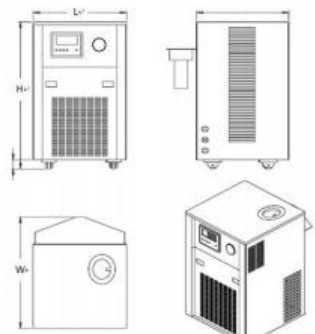

HPL-440-Q	PSU-HPL-Q	PSU-HPL-CW	Water Chiller
 <p>540 (L) × 430(W) × 128(H) mm³, 15kg</p>	 <p>380(L) × 485(W) × 90(H) mm³, 7.5kg</p>	 <p>288(L) × 482(W) × 90(H) mm³, 5.5kg</p>	 <p>470 (L) × 565(W) × 900(H) mm³, 75kg</p>