

MGL-N-526.5/1~1000mW




LD PUMPED ALL-SOLID-STATE GREEN LASER

All solid state 526.5nm green laser is made features of ultra compact, long lifetime and easy operating, which is widely used in collimation, laser medical treatment, scientific experiment, optical instrument, etc.




SPECIFICATIONS

Wavelength (nm)	526.5 ± 1
Operating mode	CW
Output power (mW)	>1, 100, 200, ..., 1000
Power stability (rms, over 4 hours)	<5%, <3%
Transverse mode	Near TEM ₀₀
M ² factor	<1.5
Beam divergence, full angle (mrad)	<1.5
Beam diameter at the aperture (1/e ² , mm)	~3.0
Warm-up time (minutes)	<10
Polarization ratio	>100:1
Beam height from base plate (mm)	68.4
Operating temperature (°C)	10~35
Power supply (90-264VAC)	PSU-H-LED/PSU-H-FDA
TTL / Analog modulation	TTL or Analog with 1Hz-1kHz 1kHz-10kHz, 10kHz-30kHz optional
Expected lifetime (hours)	10000
Warranty period	1 year



MGL-N-526.5

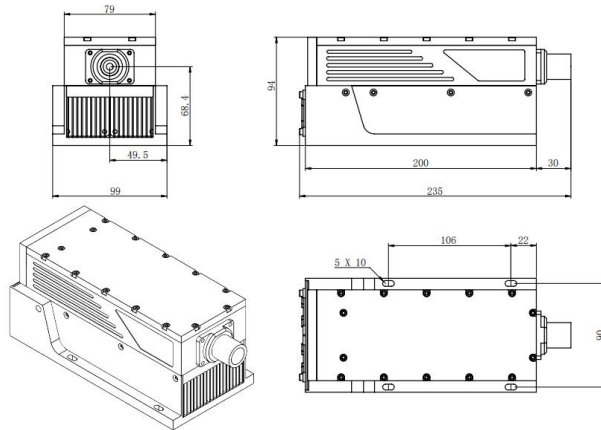

235 (L) × 99 (W) × 94 (H) mm³, 2.6 kg

PSU-H-LED



275.5 (L) × 145 (W) × 106 (H) mm³, 2.5 kg

PSU-H-FDA



275.5 (L) × 145 (W) × 106 (H) mm³, 2.5 kg