

**MSL-FN-457/1~350mW**




**SINGLE LONGITUDINAL MODE  
BLUE LASER AT 457nm**

All solid state single longitudinal mode blue laser at 457nm is made features of ultra compact, long lifetime, low cost and easy operating, which is used in DNA sequencing, flow cytometry, cell sorting, optical instrument, spectrum analysis, interference, measurement, holography, physics experiment, etc.

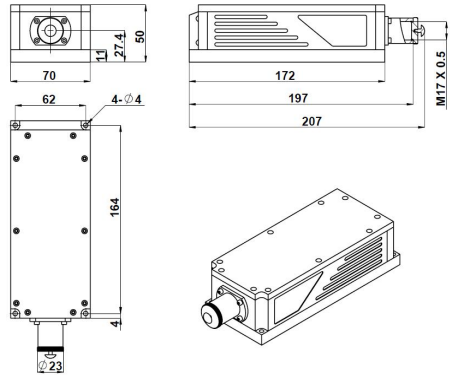
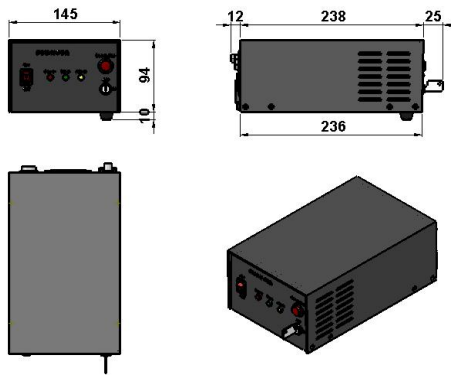


**SPECIFICATIONS**

Wavelength (nm)	457±1	
Operating mode	CW	
Output power (mW)	>1, 5, 10, 20, ... , 150	>150, 160, ... , 350
Power stability (rms, over 4 hours)	<1%, <2%, <3%	<2%, <3%, <5%
Transverse mode	TEM <sub>00</sub>	Near TEM <sub>00</sub>
Longitudinal mode	Single	
Spectral linewidth (nm)	<0.00001	
Coherent length (m)	>50	
Noise of amplitude (rms, 1Hz~20MHz)	<1%, typical<0.5%	
M <sup>2</sup> factor	<1.2	
Beam diameter at the aperture (1/e <sup>2</sup> , mm)	<2.0	
Beam divergence, full angle (mrad)	<1.2	
Polarization ratio	>100:1, Vertical±5 degree (Horizontal Optional)	
Warm-up time (minutes)	<10	
Pointing stability after warm-up (mrad)	<0.05	
Beam height from base plate (mm)	27.4	
Operating temperature (°C)	15~35	
Power supply (90-264VAC)	PSU-H-FDA	
Expected lifetime (hours)	10000	
Warranty	1 year	



**Note: The laser head needs to be used on a heat sink with good heat dissipation.**

MSL-FN-457	PSU-H-FDA
 <p>197(L)×70(W)×50(H) mm<sup>3</sup>, 1.5 kg</p>	 <p>275(L)×145(W)×104(H) mm<sup>3</sup>, 2.3 kg</p>