



OEM-S -671 /1~200mW



LD PUMPED ALL-SOLID-STATE
RED LASER

All solid state laser at 671nm is made features of ultra compact, small size, wide operating temperature, good sealing, long lifetime, low cost and easy operating, working under the pressure of 0.02kPa, which is widely used in measurement, spectrum analysis, and laser lighting show, etc.




SPECIFICATIONS

Wavelength (nm)	671±1
Operating mode	CW
Output power (mW)	>1, 5, 10, 20, ... , 200
Power stability (rms, over 4 hours)	<3%, <5%
Transverse mode	TEM ₀₀
M ² factor	<1.2
Beam diameter at the aperture(1/e ² , mm)	0.7±0.05
Beam divergence, full angle (mrad)	<1.5
Polarization ratio	>100:1 Horizontal±5 degree (Vertical Optional)
Pointing stability after warm-up (mrad)	<0.05
Pointing stability Over Temp. (μrad/°C)	<8
Warm-up time (minutes)	<5
Beam height from base plate (mm)	19
Power Consumption(W)	<30
Shock Tolerance(6ms)	7g laterally, 15g vertically
IP Rating	IP65
Power supply(90-264VAC or 5VDC)	PSU-III-OEM-97
Operating temperature (°C)	10-35
Max. Heat Dissipation of Head(W)	4W@25°C
Modulation	TTL on/off, 1Hz-1KHz, 1KHz-10KHz, 10KHz-30KHz; and Analog modulation option
Expected lifetime (hours)	10000
Warranty	1 year




OEM-S-671

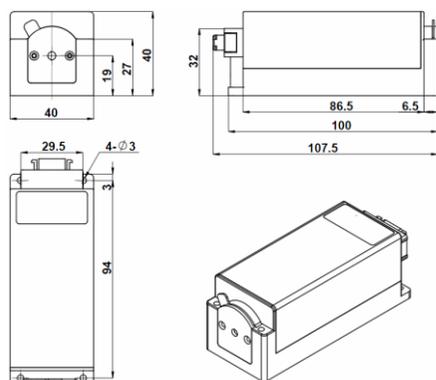

100 (L) × 40 (W) × 40(H) mm³, 0.41kg

PSU-III-OEM-97

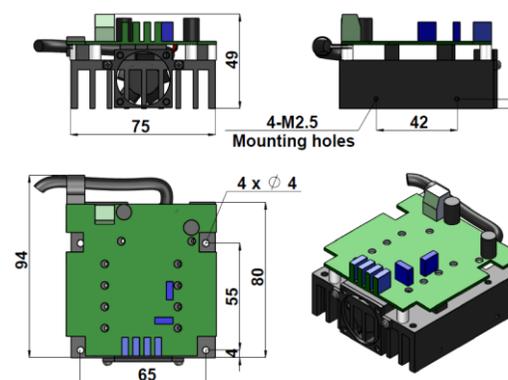

94(L) × 75(W) × 49(H) mm³, 0.23kg