

PGL-VI-488



PGL-VI high power blue laser module at 488nm is made features of small size, high output power, long lifetime, which made it be used widely in collimation, laser medical treatment, scientific experiment, optical instrument and so on.

SYSTEM SPECIFICATIONS*

Wavelength	nm	488
Wavelength tolerance	nm	±10
Output power	mW	1-50
Operating mode		CW
Transverse mode		Near TEM ₀₀
Beam diameter at the aperture(1/e ²)	mm	~3.5
Beam divergence, full angle	mrاد	<1
Expected lifetime	hours	10000
Warranty	years	1

Focus adjustable laser is optional.

ELECTRICAL SPECIFICATIONS

Operating voltage(internal PCB)	6VDC(TTL10kHz, optional)
Operating voltage(external PCB1)	5VDC(TTL30kHz or Analog0-3V,0-5V, optional)
Operating voltage(external PCB2)	5-12VDC(TTL30kHz and Analog 0-3V,0-5V, optional)
Connection	Cable with flying leads

ENVIRONMENTAL CONDITIONS


Operating temperature	0°C to 40°C
Storage temperature	-20°C to 80°C
Humidity	<90%, non-condensing
Dissipated heat	<2W

MECHANICAL SPECIFICATIONS


Laser head diameter Φ	mm	12
Length	mm	50
Material		Aluminum
Shell polarity		The housing is isolated.

**All testing data under the conditions of temperature 25°C.*


Dimensions of laser(Internal PCB, $\Phi 12 \times 50 \text{mm}^2$, 6VDC, TTL)

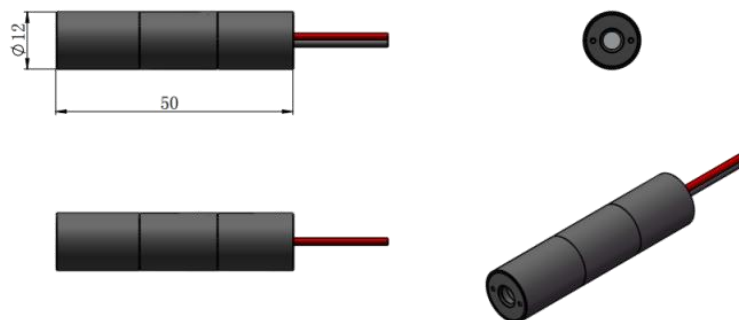

Dimensions of external PCB1(11×25mm², 5VDC, TTL or Analog)

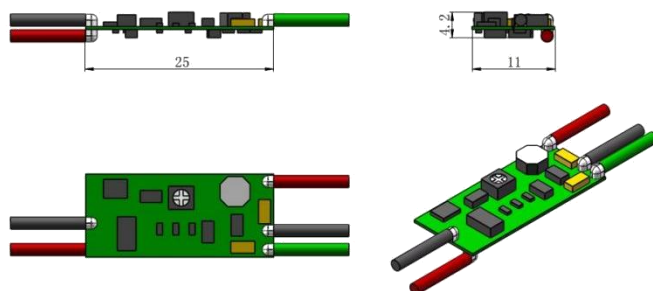

Dimensions of external PCB2(*wide voltage input range*, 20×30mm², 5-12VDC, TTL and Analog)

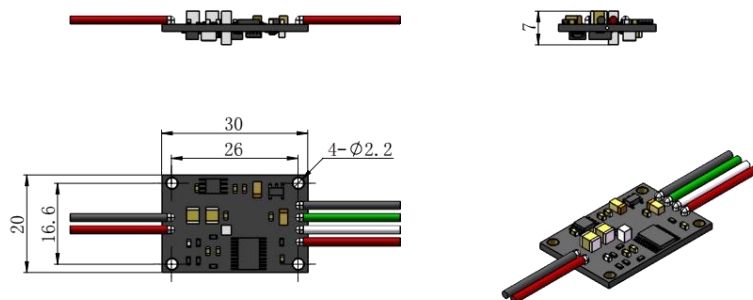


AD-6V 1A POWER ADAPTER

Input 100-240VAC 50-60Hz

Output DC 6V 1A

Dimensions of power adapter (mm):

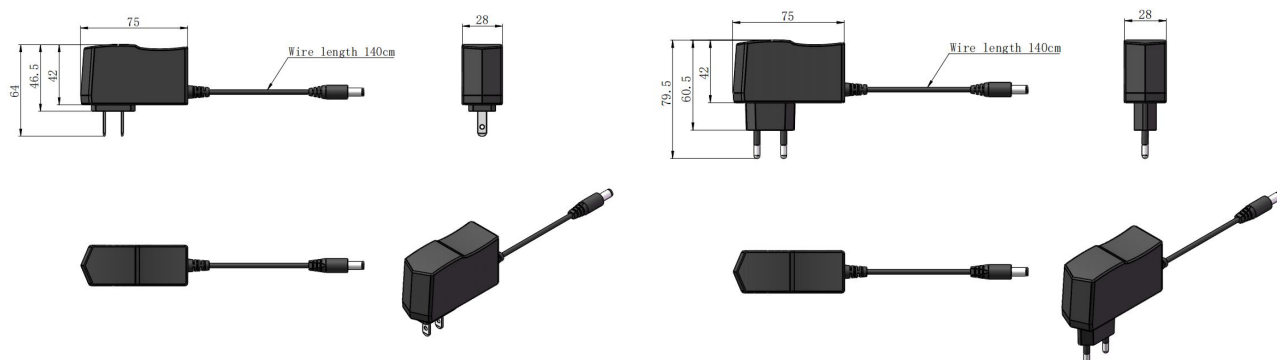


AD-5V 5A POWER ADAPTER

Input 85-264VAC 47/63Hz

Output DC 5V 5A

Dimensions of power adapter (mm):

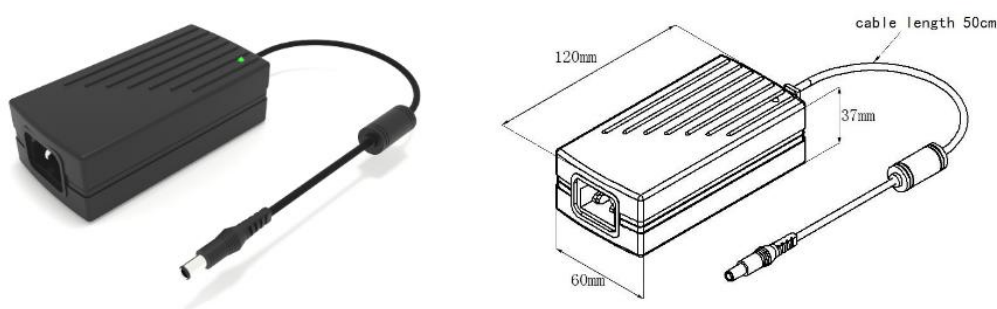


AD-12V 3.34A POWER ADAPTER

Input 100-240VAC 50/60Hz

Output DC 12V 3.34A

Dimensions of power adapter (mm):

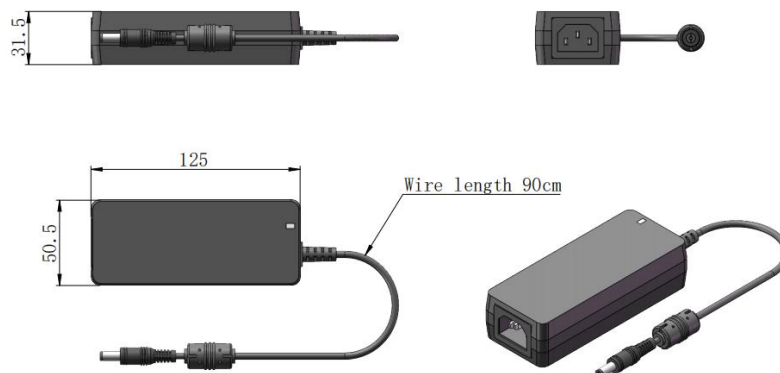

MODULE MOUNTING SPECIFICATIONS

Model type		MMU-12
Module mounting size	mm	30 x 25 x 18mm
Applicable models size $\varnothing$	mm	12mm
Through-hole $\varnothing$	mm	3mm
Through-hole distance	mm	25 x 18mm
Dimensions of module mounting (mm):		

