

TEM-F-1578DFB/1~10mW ( $TEM_{00}$ )



**INFRARED DIODE LASER  
AT 1578nm**

It features  $TEM_{00}$  mode, ultra compact design, long lifetime, cost-effectiveness and easy operation. They are used in measurement, communication, spectrum analysis, etc

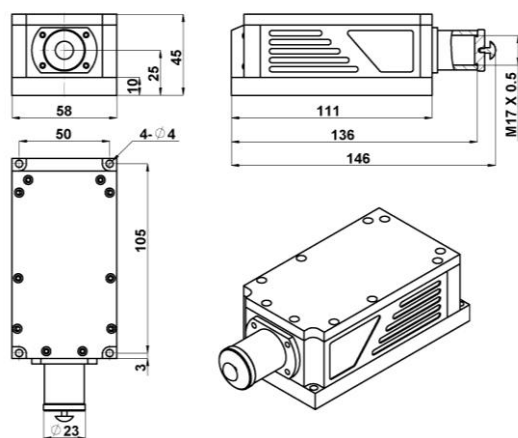
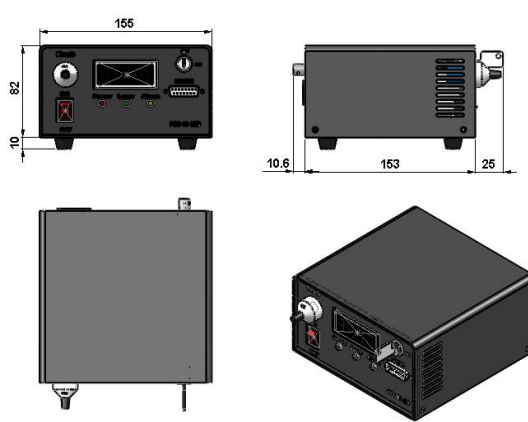
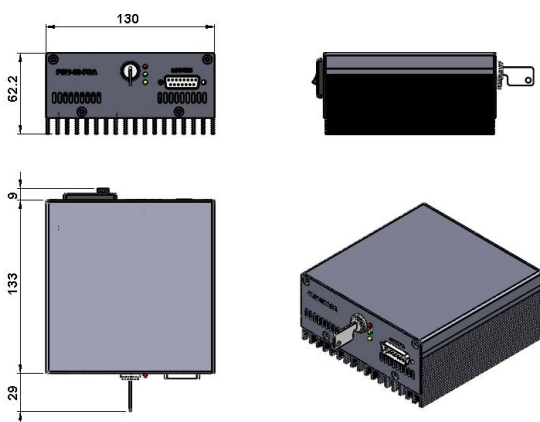


SPECIFICATIONS

Central wavelength (nm)	1578±2	
Operating mode	CW	
Output power (mW)	>1,2,3.....,10	
Power stability (rms, over 4 hours)	<2%, <3%, <5%	
Transverse mode	$TEM_{00}$	
Ellipticity	>0.95	
$M^2$ factor	<1.1	
Spectral linewidth (MHz)	~3	
Beam diameter at the aperture ( $1/e^2$ ,mm)	~1.0	
Beam divergence, full angle (mrad)	<1.5	
SMSR (dB)	35	
Warm-up time (minutes)	<5	
Beam height from base plate (mm)	25	
Operating temperature (°C)	25±3	
Power supply (85-264VAC)	PSU-III-LED	PSU-III-FDA
TTL / Analog modulation	TTL or Analog with 1Hz-1kHz 1kHz-10kHz, 10kHz-30kHz optional	
Expected lifetime (hours)	10000	
Warranty	1 year	



Note: The laser head needs to be used on a heat sink with good heat dissipation.

TEM-F-1578DFB	PSU-III-LED	PSU-III-FDA
 <p>146 (L) ×58(W) ×45 (H) mm<sup>3</sup>, 0.7kg</p>	 <p>188.6 (L) ×155(W) ×92 (H) mm<sup>3</sup>, 1.5kg</p>	 <p>171(L) ×130(W) ×62.2 (H) mm<sup>3</sup>, 1.2kg</p>