

FS-G-515A/1-20W


## FEMTOSECOND PULSED LASER AT 515nm

Femtosecond pulsed laser at 515nm is made features of short pulse duration, high repetition rate, high stability and good beam quality, which is used in sapphire marking, ceramic cutting, semiconductor cutting, film scribing, physics experiment, etc.



### SPECIFICATIONS

Wavelength (nm)	515±5
Average power (W) <sup>1</sup>	1-20 (20W@200kHz)
Single pulse energy (μJ)	1-200 (200μJ @50kHz)
Rep. rate (kHz)	50-1000
Pulse duration (fs)	<500
Peak power (MW)	1-250
Ave power stability (rms, 4 hours±3°C)	<2%, <1%
Warm-up time (minutes)	<10
Transverse mode	TEM <sub>00</sub>
M <sup>2</sup>	<1.3
Beam divergence, full angle (mrad)	<1.0
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	<3
Polarization ratio	>100:1 Horizontal
Beam height from base plate (mm)	110
Cooled method	Water cooled
Operating temperature (°C)	15-35
Power supply (100-240VAC)	RAD1PS
Expected lifetime (hours)	>10000

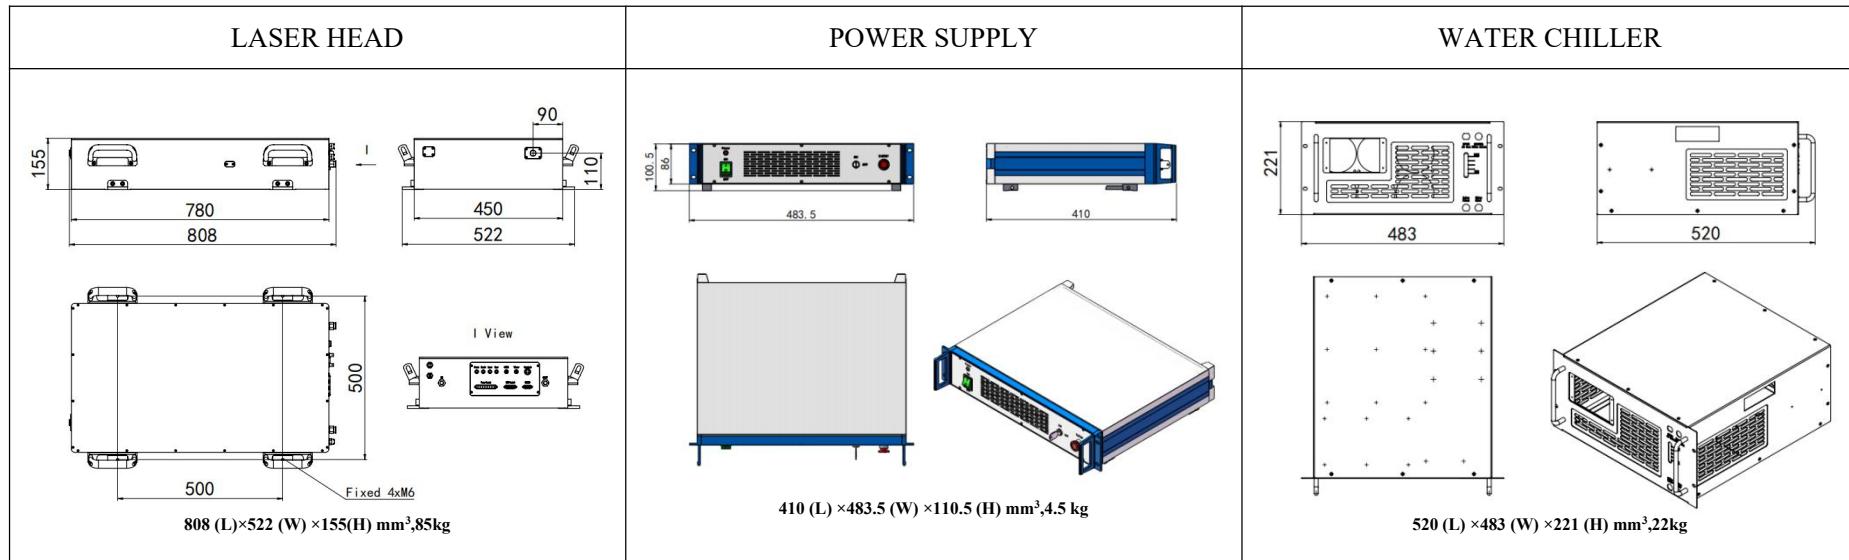

1. Integrated AOM for fine power control and fast power modulation.