


■ Features


- ◆ High output power of 30W
- ◆ 200 μ m/0.22NA multimode optical fiber
- ◆ Center wavelength 915 \pm 10nm

■ Applications

- ◆ Medical Application
- ◆ Industrial Processing

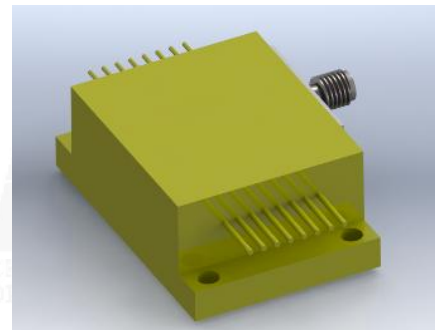

Outline Dimension (mm)

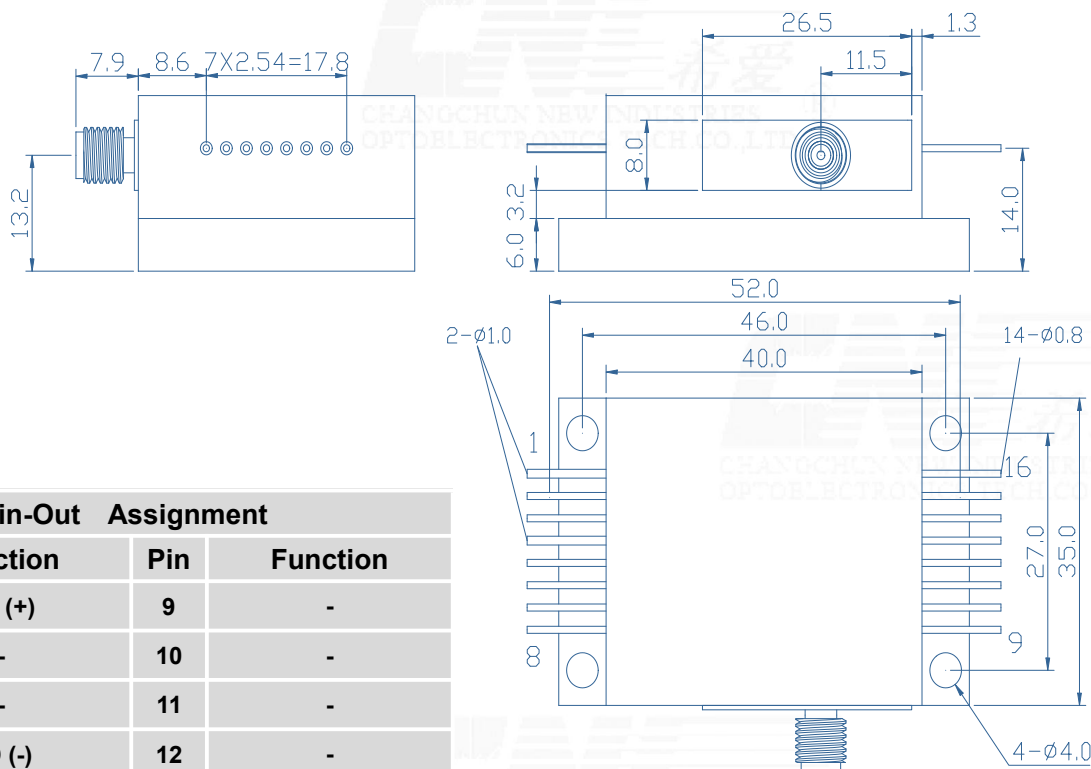

Pin-Out Assignment

| Pin | Function | Pin | Function |
|-----|-------------------|-----|------------|
| 1 | LD (+) | 9 | - |
| 2 | - | 10 | - |
| 3 | - | 11 | - |
| 4 | LD (-) | 12 | - |
| 5 | - | 13 | PD (P) |
| 6 | Aiming Beam(0V) | 14 | PD (N) |
| 7 | Aiming Beam(+5V)* | 15 | Thermistor |
| 8 | - | 16 | Thermistor |

Typical Device Performance (25°C)

| | Min | Typical | Max | Unit |
|-----------------------------------|-----|---------|-----|---------|
| Optical | | | | |
| CW Output Power | - | 30 | - | W |
| Center Wavelength | - | 915±10 | - | nm |
| Spectral Width (90% of Power) | - | <6.0 | - | nm |
| Wavelength Shift with Temperature | - | 0.3 | - | nm / °C |
| Electrical | | | | |
| Threshold | - | 1.9 | - | A |
| Operating Current | - | 18.8 | - | A |
| Operating Voltage | - | 3.4 | - | V |
| Slope Efficiency | - | 1.75 | - | W / A |
| Power Conversion Efficiency | - | 46 | - | % |
| Aiming Laser* | | | | |
| CW Output Power | - | 2 | - | mW |
| Center Wavelength | - | 650±10 | - | nm |
| Operating Current | - | <30 | - | mA |
| Operating Voltage | - | 5 | - | V |
| Fiber* | | | | |
| Fiber Core Diameter | - | 200 | - | µm |
| Numerical Aperture | - | 0.22 | - | - |
| Fiber Length | - | 1-5 | - | m |
| Fiber Connector | - | SMA905 | - | - |

* Customized fiber and connector available.


Absolute Ratings

| | Min | Max | Unit |
|---------------------------------------|-----|----------------------|------|
| Operating Temperature | 15 | 35 | °C |
| Operating Relative Humidity | - | 75 | % |
| Cooling Mode | - | Water cooling (25°C) | - |
| Storage Temperature | -20 | 80 | °C |
| Storage Relative Humidity | - | 90 | % |
| Lead Soldering Temperature (10 s max) | - | 250 | °C |

* Measuring specifications.

All figures in this specification are measured by CNI's method and may contain measurement deviations.

The above specifications are for reference purpose only and subjected to change without prior notice.

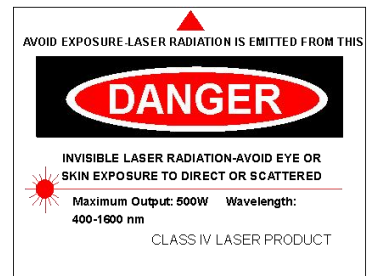

Changchun New Industries Optoelectronics Tech. Co., Ltd
<http://www.cnilaser.com>

◆ CONTACT

No.888, JinHu Road, High-tech zone, Changchun
 130103, R.P. China

Phone: 0086-431-85603799

Fax: 0086-431-87020258