

MDL-XF-1532/1-2W


**INFRARED DIODE LASER
AT 1532nm**

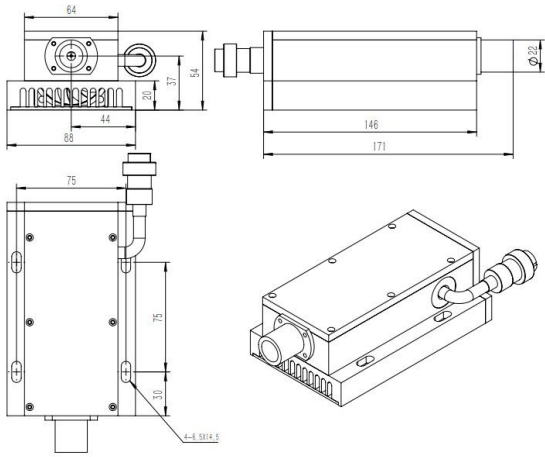
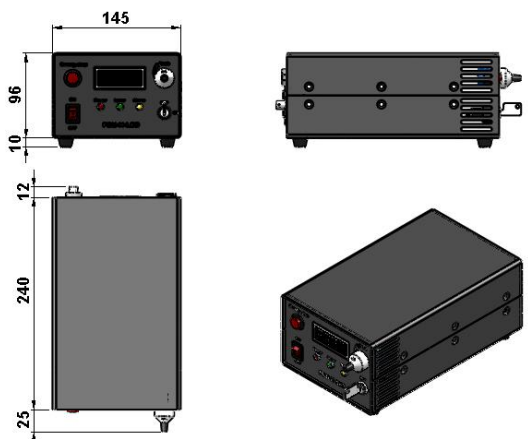
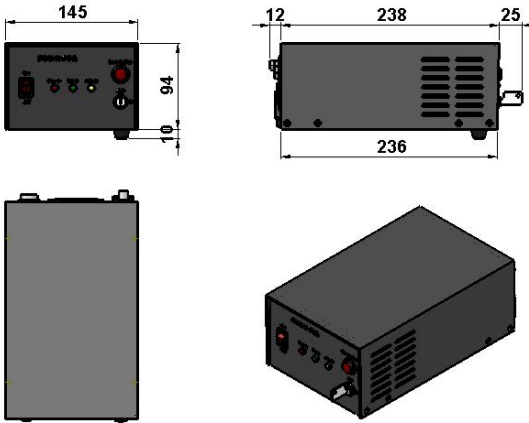
It features ultra compact design, long lifetime, cost-effectiveness and easy operation. They are used in measurement, communication, spectrum analysis, etc.



SPECIFICATIONS

| | | |
|---|--|-----------|
| Central wavelength (nm) | 1532±10 | |
| Operating mode | CW | |
| Output power (mW) | >1000, 1100, ... , 2000 | |
| Power stability (rms, over 4 hours) | <1%, <2%, <3% | |
| Transverse mode | Multimode | |
| Dimensions of beam at the aperture (mm) | ~5×8 | |
| Beam divergence, full angle (mrad) | <3.0 | |
| Warm-up time (minutes) | <5 | |
| Beam height from base plate (mm) | 37 | |
| Operating temperature (°C) | 10~35 | |
| Power supply (100-240VAC) | PSU-H-LED | PSU-H-FDA |
| TTL / Analog modulation | TTL or Analog with 1Hz-1kHz 1kHz-10kHz, 10kHz-30kHz optional | |
| Expected lifetime (hours) | 10000 | |
| Warranty | 1 year | |



| MDL-XF-1532 | PSU-H-LED | PSU-H-FDA |
|--|--|---|
|  <p>171(L) × 88(W) × 54(H) mm³, 1.4kg</p> |  <p>277 (L) × 145(W) × 106(H) mm³, 2.3kg</p> |  <p>275 (L) × 145(W) × 104(H) mm³, 2.1kg</p> |