



MPL-III-532A

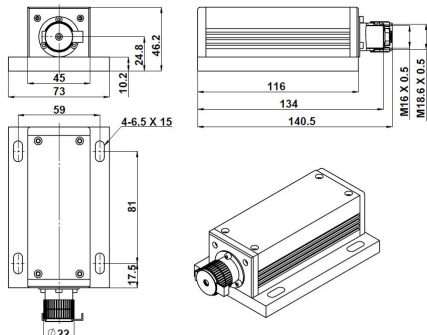
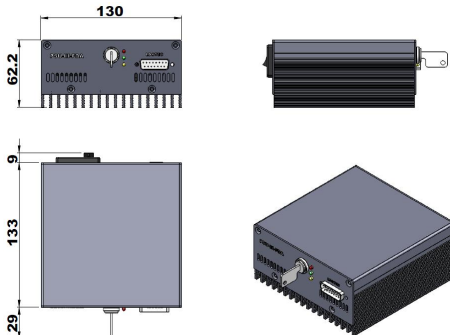
LD PUMPED ALL-SOLID-STATE PASSIVELY LASER

All solid state passively laser has the features of high peak power and short pulse duration, which is widely used in scientific research, laser micromaching, laser radar ranging, environment monitoring, laser ultrasonic monitoring and LIBS (Laser Induced Breakdown Spectroscopy) etc.



SPECIFICATIONS

Wavelength (nm)		532±1
Operating mode		Passively
Average power (mW) ¹		1-30
Single pulse energy (μJ) ²		1-5
Pulse duration (ns)		~1.3
Peak power (kW)		0.8-4
Rep. rate	Int ³	1Hz-4kHz
	Ext ⁴	1Hz-4kHz
	QCW ⁵	5-15kHz
Power stability (rms, 4 hours ±3°C)		<3%, <2%, <1%
Transverse mode		TEM ₀₀
M ²		<1.5
Beam diameter at the aperture (mm)		~1.2
Beam divergence, full angle (mrad)		<1.5
Polarization ratio		>100:1, Vertical (Horizontal optional)
Warm-up time (minutes)		<5
Beam height from base plate (mm)		22
Operating temperature (°C)		10-35
Power supply (100-240VAC)		PSU-III-FDA
Expected lifetime (hours)		>10000

LASER HEAD	POWER SUPPLY (PSU-III-FDA) ⁶
 140.5 (L) × 73 (W) × 46.2 (H) mm³, 0.6kg	 171 (L) × 130 (W) × 62.2 (H) mm³, 1.2kg

- 1 Average power (mW)= Single pulse energy (μJ)* Rep. rate(kHz)
- 2 Any energy level can be selected within this range.
- 3 The frequency is selectable from one discrete values within the range.
- 4 External triggered.
- 5 The rep.rate is a free running value within this range.
- 6 Fixed output energy.