

**MSL-T-XXX Series (300-700nm)**

**WATER COOLING CW SINGLE LONGITUDINAL LASER**

All solid state single longitudinal mode laser is made features of ultra compact, long lifetime, low cost and easy operating. Single-longitudinal-mode lasers at 369 nm, 375 nm, 405nm and 411 nm are important light sources for atomic physics, quantum information science, precision spectroscopy, and biophotonics.



**SPECIFICATIONS**

Wavelength (nm)	369±1	375±1	405±1	411±1
Operating mode	CW			
Longitudinal mode	Single			
Output power (mW) <sup>1</sup>	1-80			
Spectral line width (nm)	<0.000005 (<10MHz)			
Coherent length (m)	>10			
Power stability (rms, 4 hours±3°C)	<2%, <1%			
Beam divergence, full angle (mrad)	<1			
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	<2			
M <sup>2</sup>	<1.2			
Noise of amplitude (rms,20Hz-20MHz)	<1%			
Polarization ratio	>100:1,Vertical(Horizontal optional)			
Beam height from base plate (mm)	51			
Cooled method	Water cooled			
Operating temperature (°C)	15-35			
Power supply (220/110VAC)	RAD1PS			
Expected lifetime (hours)	>10000			

LASER HEAD	POWER SUPPLY <sup>2</sup>	WATER CHILLER
<p>274 (L) × 250 (W) × 97 (H) mm<sup>3</sup>, 8.2 kg</p>	<p>301.5(L) × 224(W) × 114(H) mm<sup>3</sup>, 2.3 kg</p>	<p>370(L) × 258 (W) × 240.6(H) mm<sup>3</sup>, 8.3 kg</p>

<sup>1</sup> Any power level can be selected in this range.

<sup>2</sup> Fixed output power.

**MSL-T-XXX series (701-1000nm)**

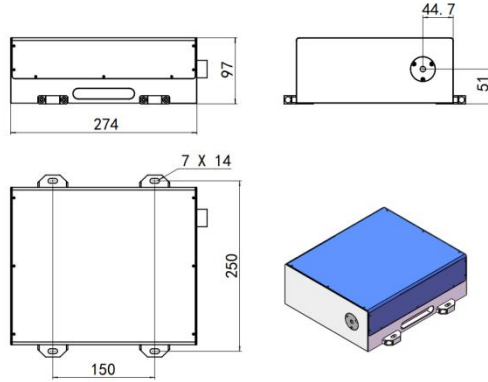
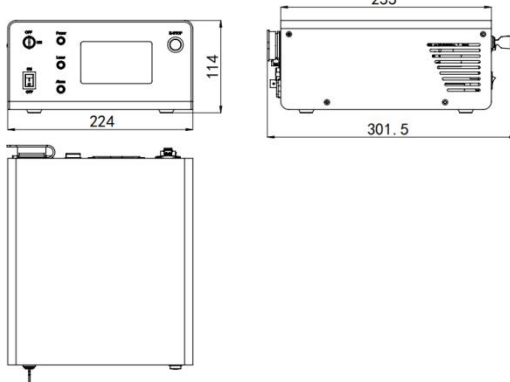
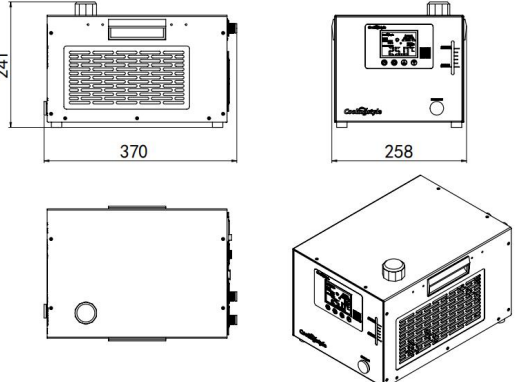
**WATER COOLING CWSINGLE LONGITUDINAL LASER**

All solid state single longitudinal mode laser is made features of ultra compact, which is widely used in quantum computing, cell sorting, laser cooling of potassium atoms, spectrum analysis, surface-enhanced Raman scattering, cold-atom physics, etc.



**SPECIFICATIONS**

Wavelength (nm)	729±1	770±1	785±1	808±1
Operating mode	CW			
Longitudinal mode	Single			
Output power (mW) <sup>1</sup>	1-300			
Spectral line width (nm)	<0.000005(<10MHz)			
Coherent length (m)	>10			
Power stability (rms, 4 hours±3°C)	<2%, <1%			
Beam divergence, full angle (mrad)	<1			
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	<2			
M <sup>2</sup>	<1.2			
Noise of amplitude (rms,20Hz-20MHz)	<1%			
Polarization ratio	>100:1,Vertical(Horizontal optional)			
Beam height from base plate (mm)	51			
Cooled method	Water cooled			
Operating temperature (°C)	15-35			
Power supply (220/110VAC)	RAD1PS			
Expected lifetime (hours)	>10000			

<p><b>LASER HEAD</b></p>  <p style="text-align: center;">274 (L) ×250(W) ×97(H) mm<sup>3</sup>, 8.2 kg</p>	<p><b>POWER SUPPLY<sup>2</sup></b></p>  <p style="text-align: center;">301.5(L) ×224(W) ×114(H) mm 3, 2.3 kg</p>	<p><b>WATER CHILLER</b></p>  <p style="text-align: center;">370(L) ×258 (W) ×240.6(H) mm<sup>3</sup>, 8.3 kg</p>
---	--	---

1 Any power level can be selected in this range.

2 Fixed output power.