Performance Advantages:

- High brightness, high efficiency
- Precise adjustment of brightness
- Support TTL control output
- Customizable

Product Model	SLE-I
Channal	1
Wavelength	365nm
Power	1500mW
Control Mode	0~100% dimming, accuracy of 1%
ON/OFF Response Times	Rising/ Descending Edge (10%~90%) ＜50us
Operating Mode	Continuous Output, Default TTL Modulation (Analog Modulation Optional)
Control Mode	Support RS232 host computer control
Control Options	SMA - External trigger TTL signal (external trigger analog modulation optional) Serial Interface (RS232) - Light Output ON/OFF and brightness adjusting Manual control box (optional) - Light Output ON/OFF and brightness adjusting
Optical Transmission	3mm diameter liquid optical waveguide (LLG)
Operating Temperature	10~35℃
Power Input	DC12V
Cooled Method	Air Cooled
Size	171mmx114mmx100mm（Reference）
Warranty	2 Years

Spectrogram:

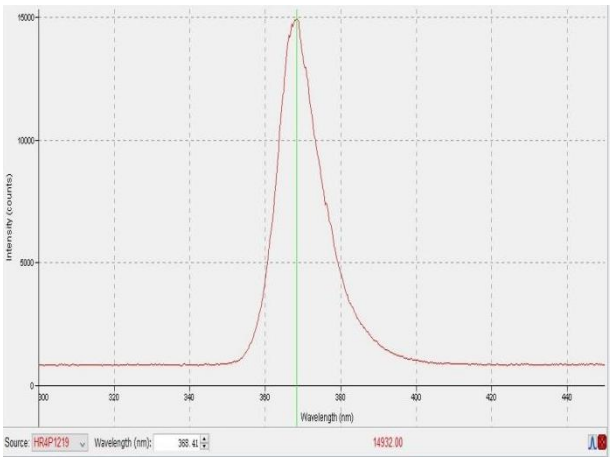
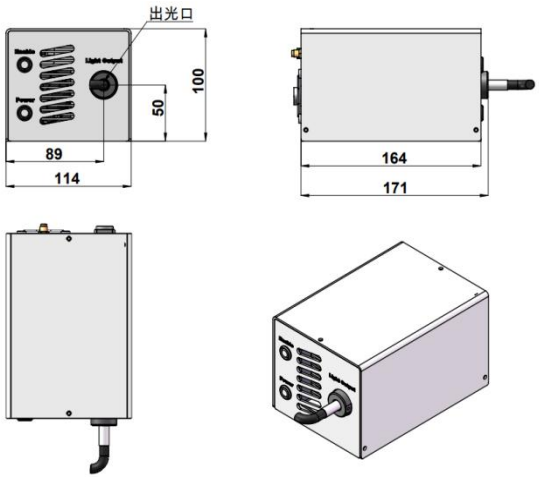
Dimensions: