

MDL-HD-405/4-16W




**VIOLET DIODE LASER
AT 405nm**

It features ultra compact design, long lifetime, cost-effectiveness and easy operation. They are widely used in laser projection, laser shows, biomedical applications, holography, metrology. etc.




SPECIFICATIONS

Central wavelength (nm)	405±5
Operating mode	CW
Output power (W) ¹	4-16
Power stability (rms, 4 hours ± 3°C)	<2%, <1%, <0.5%
Transverse mode	Multimode
Polarization direction	Horizontal+ Vertical
Beam diameter at the aperture (mm)	~8.0×4.0
Beam divergence, full angle (mrad)	~4.0×0.5
Warm-up time (minutes)	<5
Beam height from base plate (mm)	25
Operating temperature (°C)	25±3
Power supply (100-240VAC)	PSU-N-FDA/PSU-N-LED
Modulation option	DC-1kHz, 1kHz-10kHz, 10kHz-30kHz optional; TTL and Analog optional
Expected lifetime (hours)	>10000




LASER HEAD²

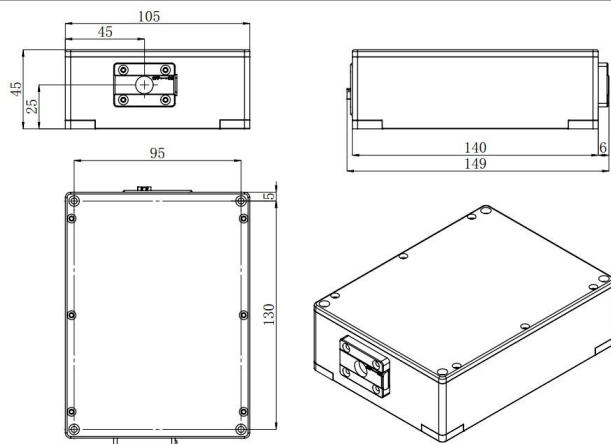

149 (L) × 105 (W) × 45 (H) mm³, 1.7kg

HEATSINK optional

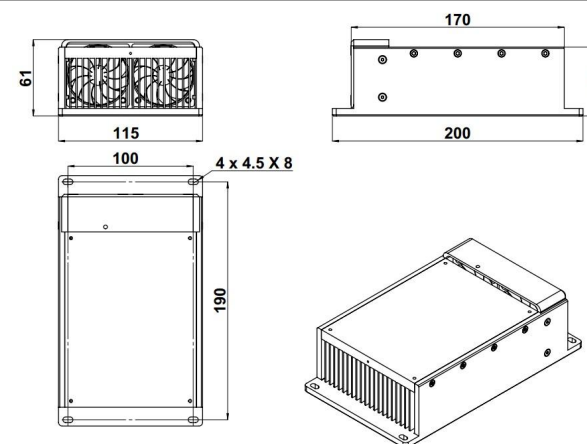

200 (L) × 115 (W) × 61 (H) mm³, 1.4kg

POWER SUPPLY (PSU-N-FDA) ³	POWER SUPPLY (PSU-N-LED) ⁴
<p data-bbox="510 735 801 759">307 (L) × 150 (W) × 106 (H) mm³, 3.0kg</p>	<p data-bbox="1447 735 1738 759">283 (L) × 180 (W) × 104 (H) mm³, 2.5kg</p>

- 1 Any power level can be selected in this range.
- 2 The laser head needs to be used on a heat sink with good heat dissipation.
- 3 Fixed output power; Modulation up to 30kHz.
- 4 Output power adjustable 10-100%; RS232 control optional; Modulation up to 30kHz.