MDL-H-1310/800-3000mW

INFRARED DIODE LASER AT 1310nm

It features ultra compact design, long lifetime, cost-effectiveness and easy operation. They are used in medical imaging, flow cytometry, DNA sequencing, etc.

SPECIFICATIONS

Central wavelength (nm)	1310±20
Operating mode	CW
Output power (mW)[1]	800-3000
Power stability (rms, 4 hours ± 3°C)	<2%, <1%, <0.5%
Transverse mode	Multimode
Beam diameter at the aperture (mm)	~5×8
Beam divergence, full angle (mrad)	<3.0
Warm-up time (minutes)	<5
Cooled method	Air cooled
Beam height from base plate (mm)	29
Operating temperature (°C)	10-35
Power supply (100-240VAC)	PSU-H-FDA/PSU-H-LED
Modulation option	DC-1kHz, 1kHz-10kHz, 10kHz-30kHz optional; TTL and Analog optional
Expected lifetime (hours)	>10000



LASER HEAD

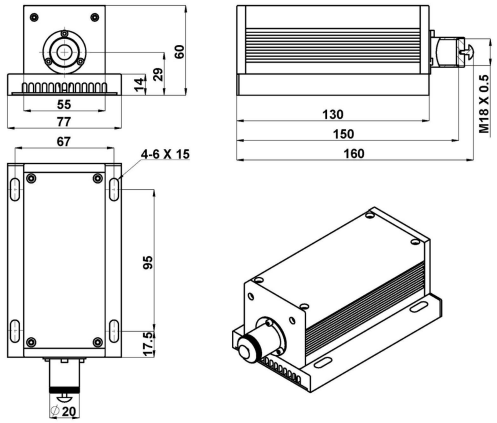

160 (L) ×77 (W) ×60 (H) mm³, 0.9kg

POWER SUPPLY (PSU-H-FDA)[2]

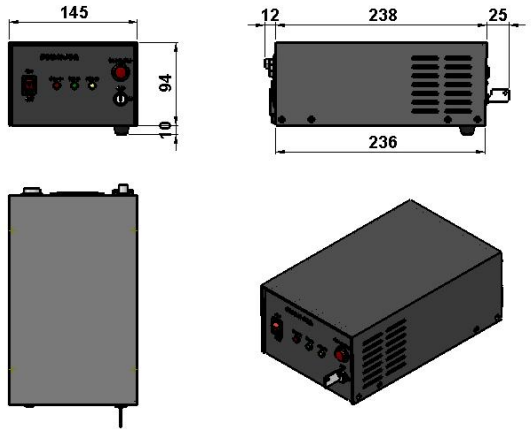

275 (L) ×145 (W) ×104 (H) mm³, 2.1kg

POWER SUPPLY (PSU-H-LED)[3]

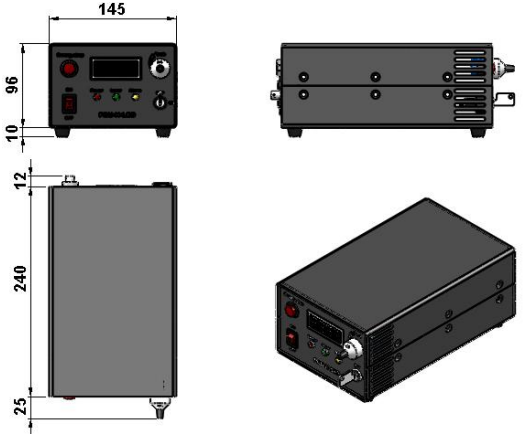

277 (L) ×145 (W) ×106 (H) mm³, 2.3kg

1 Any power level can be selected in this range.

2 Fixed output power; Modulation up to 30kHz.

3 Output power adjustable 10-100%; RS232 control optional; Modulation up to 30kHz.

Website: http://www.cnilaser.com E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068