

MGL-SF-597-N/1~30mW

LD PUMPED ALL-SOLID-STATE  
YELLOW LASER

With narrow spectral bandwidth, spectral purity and a high level of wavelength.597nm laser features of ultracompact, long lifetime, low cost and easy operating, which is used in laser display, medical




SPECIFICATIONS

Wavelength (nm)	597±1
Operating mode	CW
Spectral line width (nm)	<0.03
Output power (mW)	>1, 2, ...,30
Power stability (rms, over 4 hours)	<5%, <3%
Transverse mode	Near TEM <sub>00</sub>
Beam divergence, full angle (mrad)	<3
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	~4
Polarization ratio	>100:1
Beam height from base plate (mm)	100
Warm-up time (minutes)	<10
Operating temperature (°C)	15~30
Power supply (90-264VAC)	PSU-W-FDA
Expected lifetime (hours)	10000
Warranty period	1 year




MGL-SF-597-N

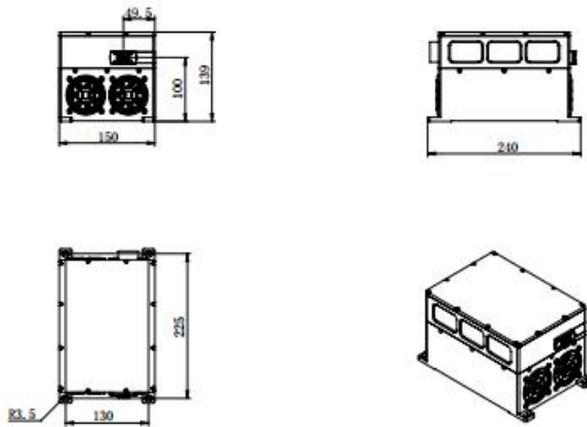

240(L)×150(W)×139(H) mm<sup>3</sup>, 7.5kg

PSU-W-FDA

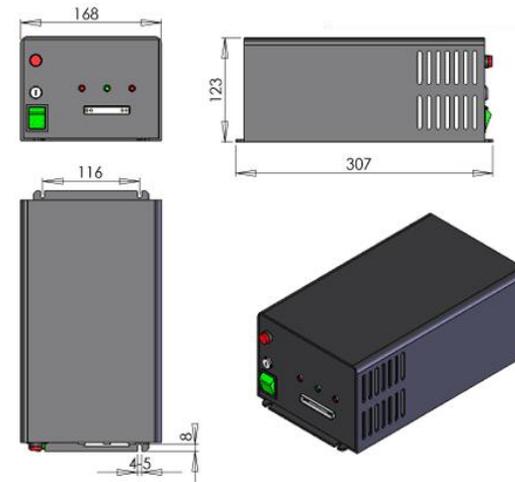

307 (L) ×168(W) ×123(H) mm<sup>3</sup>, 4.5kg